
GRAVITRONIX
PRECISION IN EVERY LOAD

PRODUCT DATASHEET

BB-BM-250

BENDING BEAM LOAD CELL MOUNTING KIT

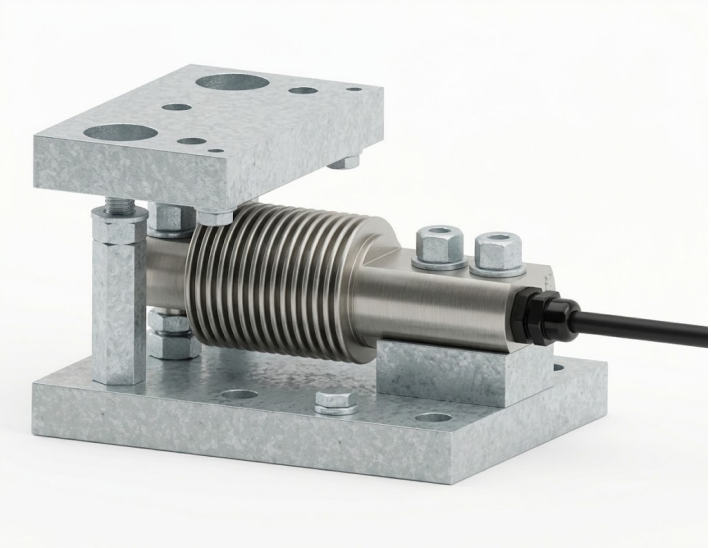

250 kg RATED CAPACITY

KEY FEATURES

- Application range: 10-250 kg
- Ball-joint load introduction
- Overload protection
- Top plate with lift-off restraint
- Galvanized or stainless steel


ORDER CODES

BB-BM-250-G	Galvanized steel
BB-BM-250-SS	Stainless steel


DIMENSIONS & TECHNICAL LAYOUT

All dimensions in mm · Not to scale


SIDE VIEW

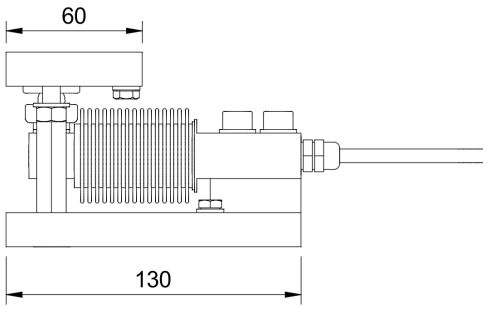

FRONT VIEW



TOP VIEW

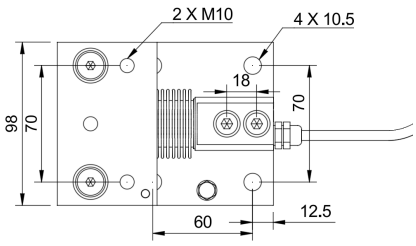

MAIN DIMENSIONS

Base plate	**130 × 98 × 15**
Top plate hole spacing	**70**
Connection holes	**4 × Ø10.5 / 2 × M10**
Overall height	**86**
Top mounting plate	**60 × 98 × 15**

APPLICATIONS

Tank & silo weighing · Platform scales
Hopper & bunker weighing

COMPATIBLE LOAD CELLS

Zemic BM11-C3	5...200 kg
Flintec SB8	10...250 kg
Utilcell Model 300	250 kg
HBK / HBM Z6	5...200 kg
Dini Argeo FXC	10...250 kg

Compatibility with other brands and models is possible.
Custom dimensions are available on request.