
GRAVITRONIX
PRECISION IN EVERY LOAD

PRODUCT DATASHEET

BB-RRFP-250

BENDING BEAM LOAD CELL MOUNTING KIT

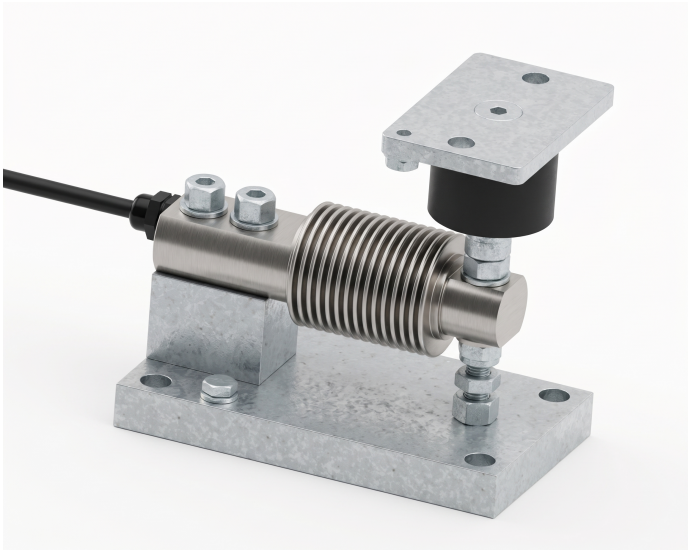

250 kg RATED CAPACITY

KEY FEATURES

- Application range: 10-250 kg
- Shock and vibration absorption
- Overload protection
- Easy installation with top mounting plate
- Galvanized or stainless steel


ORDER CODES

BB-RRFP-250-G	Galvanized steel
BB-RRFP-250-SS	Stainless steel


DIMENSIONS & TECHNICAL LAYOUT

All dimensions in mm · Not to scale


SIDE VIEW

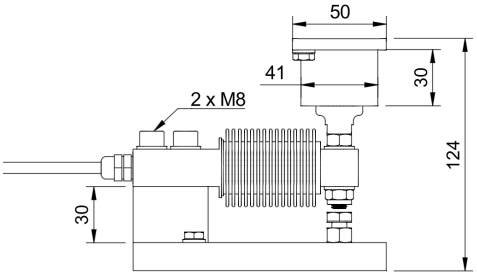

FRONT VIEW

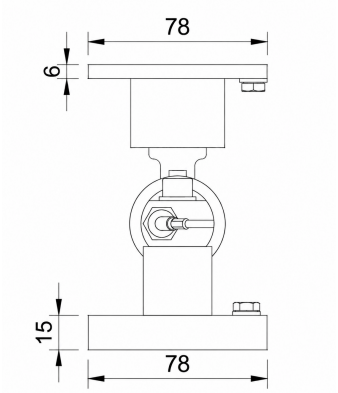

TOP VIEW

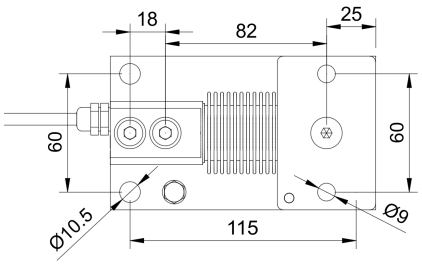

MAIN DIMENSIONS

Base plate	**135 × 78 × 15**
Mounting-hole pitch	**115 × 60**
Mounting holes	**Ø10.5**
Overall height	**124**
Top mounting plate	**78 × 50 × 6**

COMPATIBLE LOAD CELLS

Zemic BM11-C3	5...200 kg
Flintec SB8	10...250 kg
Utilcell Model 300	250 kg
HBK / HBM Z6	5...200 kg
Dini Argeo FXC	10...250 kg

Compatibility with other brands and models is possible.
Custom dimensions are available on request.

APPLICATIONS

Tank & silo weighing · Platform scales
Hopper & bunker weighing